

PROCEDURES FOR COMPLETION OF
APPLICATION FOR INSTALLATION IN COUNTY ROAD
RIGHT-OF-WAY AND ON COUNTY BRIDGE STRUCTURES

1. An application for any installation must be filed with the Teton County Road Department if the installation is within a county right-of-way or along any county bridge structures.
2. Application must be approved by Teton County Road Supervisor prior to any Construction.
3. Specify the width, depth, and materials that will be used. The Teton County Road Supervisor will review, and if any special guidelines are needed, it will be stated on the application under "approval".
4. After approval of application, the applicant must call the Teton County Road Department at (307) 733-7190 with a commencement date.
5. General Specifications August 21, 1995
 - a) Maximum distance from right-of-way line for any installation shall be ten (10) feet.
 - b) Minimum depth for buried installation shall be thirty (30) inches. Stream and irrigation ditch crossing shall be measured from bottom of ditch or stream and minimum shall be forty-eight (48) inches.
 - c) Bridge installation shall be in PVC conduit with approved attachment devices.
 - d) Culverts and drainage devices shall have the same minimum depth as ditches and streams forty-eight (48) inches shall be measured from bottom of culvert or drainage structure.
6. If installation is done incorrectly, and damage has occurred due to this incorrect installation, the utility company will be held responsible for all repairs, materials and labor.
7. There is no fee for this application, 08-21-95.
8. An example of the application is attached.
9. Mail the application to:
Teton County Road Department
Attn: Road Supervisor
P.O. Box 9575
Jackson, WY 83002

Or

Bring the application to the office, which is located at 3190 S. Adams Canyon Dr.,
Jackson, Wyoming

**APPLICATION MUST BE COMPLETE AND RETURNED BEFORE ANY TRENCHING
BEGINS.**

APPLICATION AND AGREEMENT
FOR TRENCHING AND UTILITY INSTALLATION

The undersigned, Applicant, hereby applies to the Road Supervisor of Teton County, Wyoming, for a permit to do certain excavating, trenching, installation and burial of utilities, on, under and through a portion of a county or public road right-of-way; the exact location and detailed description of the same being described particularly as follows:

A map or diagram of said project being attached hereto and submitted therewith.

Continuing Obligations of Applicant. Applicant hereby agrees to be solely and entirely responsible for any back filling, tamping, repairing, repaving, settling, sagging, or any other condition created by or arising out of said excavation for a period of five (5) years from the date the same is commenced.

Applicant shall be solely and totally responsible for any damage that may occur to their utility. Teton County and the Teton County Road Department personnel do not acquire any responsibility of this utility by issuing this permit.

Applicant hereby makes this application and represents to the Road Supervisor of Teton County that said excavation has not commenced and shall not commence until receipt, in writing, of the approval of said Road Supervisor.

Dated: _____

APPLICANT:

APPROVAL

The undersigned, Road Supervisor of Teton County hereby approves of the foregoing, subject to the following conditions:


Road Supervisor
Teton County

CONDITIONS OF TRENCHING


Utility Company: _____

Date: _____

- 1) The company shall notify the traveling public of any anticipated delays due to construction.
- 2) The company shall provide data to the department that certifies the specifications for trenching were met by contractor (compaction, gravel, depth, etc.) .
- 3) The company shall be responsible for assuring appropriate work zone signing is used by the contractor (RE: MUTCD).
- 4) The utility being installed in the right of way is a “guest” and at any later date when this utility is in the way of future construction the utility shall be moved by the utility owner at no cost to Teton County.
- 5) Minimum buried depth for non-electric installation shall be 30 inches from any existing surface elevation.

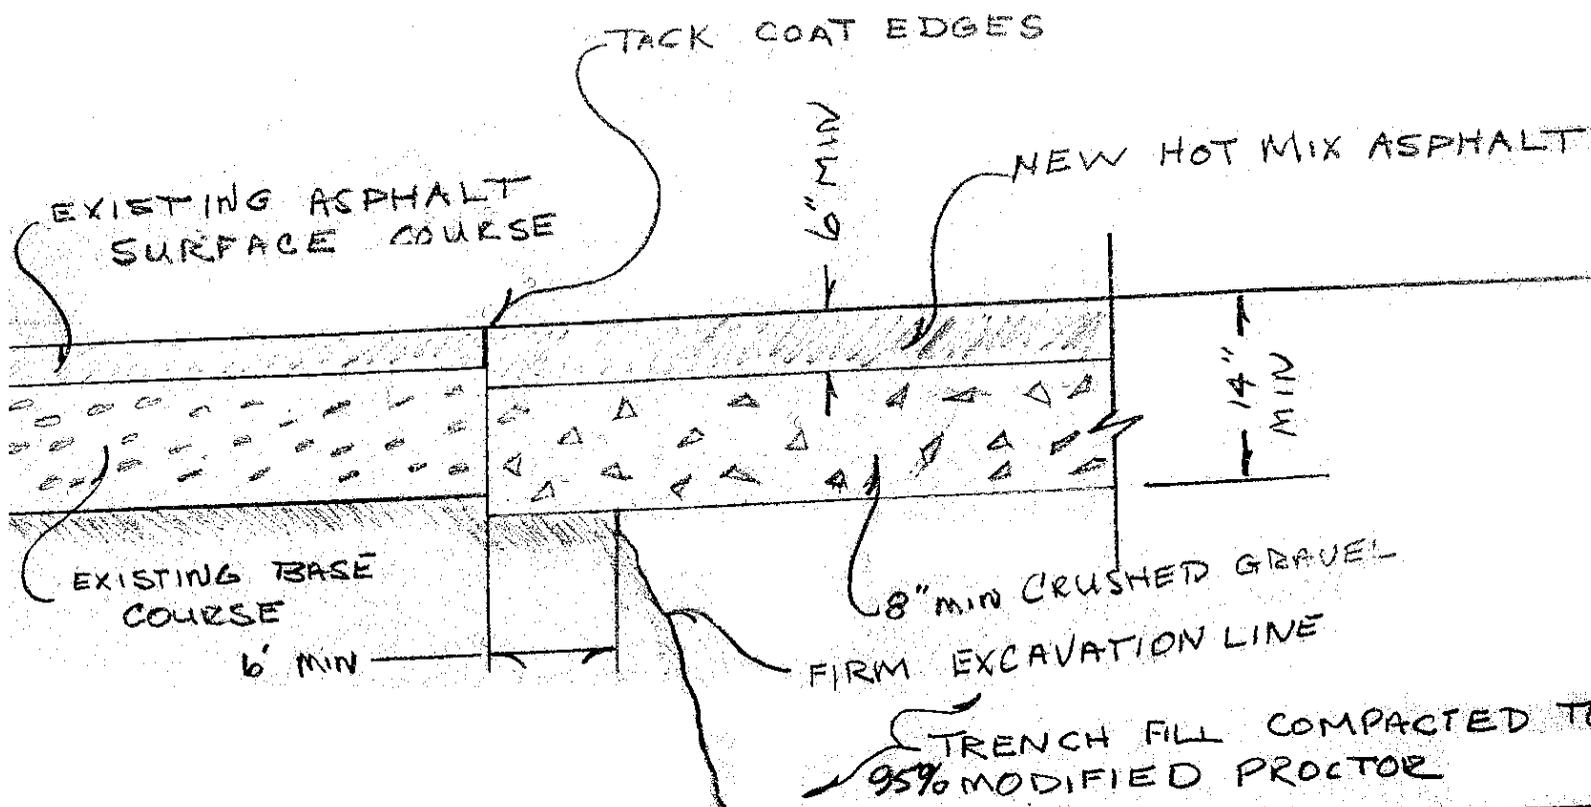

PAVEMENT RESTORATION
NO SCALE

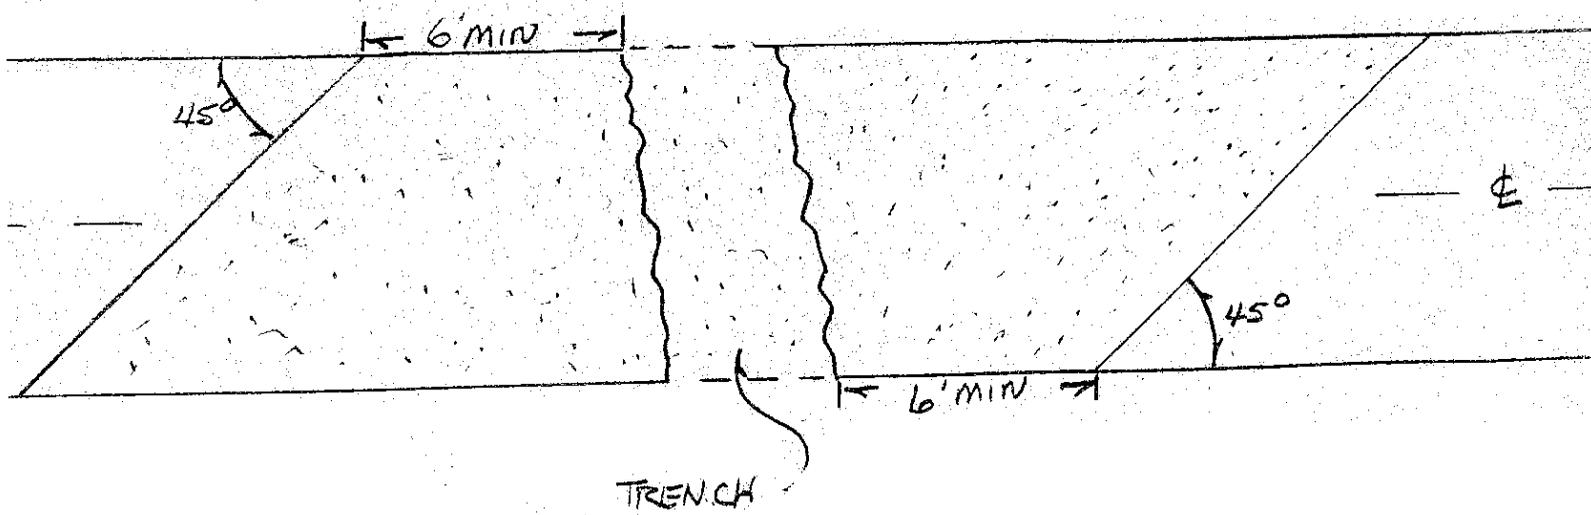

AREA TO BE RESTORED 